

STANDARD HORIZON

YAESU MUSEN CO., LTD.

Tennozu Parkside Building
2-5-8 Higashi-Shinagawa, Shinagawa-ku, Tokyo 140-0002 Japan

YAESU USA

6125 Phyllis Drive, Cypress, CA 90630, U.S.A.

YAESU UK

Unit 12, Sun Valley Business Park, Winnall Close
Winchester, Hampshire, SO23 0LB, U.K.


EBB77X700 (1904t-AC)

八重洲無線株式会社

STANDARD HORIZON

SSM-BT10

Bluetooth® HEADSET



Supplied Accessories

- Ear chip
- Ear hook
- USB Cable*
- Operation Manual (This Manual)

*USB cable is designed to charge this product. Do not use it with other products.

Specifications

Communication System:	Bluetooth specification Ver 4.1
Output:	Bluetooth specification Power Class 2
Compatible Bluetooth Profiles:	HSP/HFP
Dimensions:	60mm(W) x 15.2mm(H) x 22mm(D)
Weight (approx.):	0.42oz (12g)
Operating Temperature Range:	-4°F to 140°F (-20°C to +60°C)
Charging Temperature Range:	32°F to 113°F (0°C to +45°C)

Safety Precautions (Be Sure to Read)



Do not use this product while riding a bicycle or driving a car. Accidents can result.

For hands-free operation, use the transceiver VOX function.



Do not charge the battery in a hot location such as near a heater or under the sun.

Charge the battery in a place where the ambient temperature is in the range of 32°F to 113°F (0°C to +45°C).



Do not use in a wet environment or touch with wet hands.
An electric shock, or failure may result.



Do not disassemble or make any alteration to this product.
An injury, electric shock, or failure may result.



Keep this product out of the reach of children.
Injury to the child, or damage to this device may result.

The Bluetooth® wordmark and logo are registered trademarks owned by Bluetooth SIG, Inc. and are used under license by Yaesu Musen Co., Ltd.


Control & Connection

Multi Function Button (MFB)

- Power ON: Press and hold for 3 seconds.
- Power OFF: Press and hold for 5 seconds.


When the VOX function of the connected radio is not activated, each press switches the transceiver transmit and receive PTT.

To temporarily mute the TX audio while the paired transceiver is operating in VOX function, disable the SSM-BT10 microphone by pressing VOL (+) and VOL (-) simultaneously. Press VOL (+) and VOL (-) simultaneously to enable the microphone again.




Battery Charging

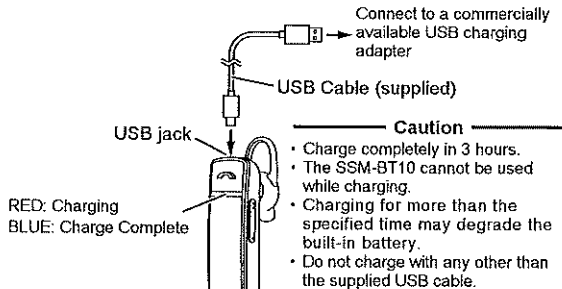If the LED flashes in red before or during the first use, charge the battery.




When connecting to a radio for the first time -Pairing-

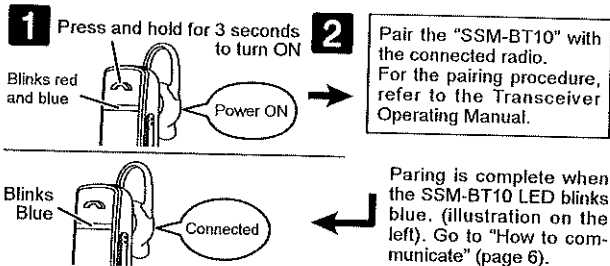It is necessary to register (pair) this product to the transceiver. Before it will operate with it.



If not connected, the power will be turned OFF after about 3 minutes.


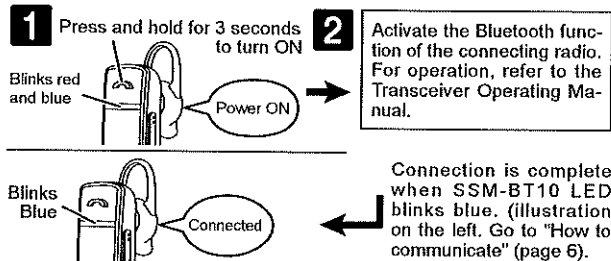
When connecting to a previously paired transceiver







Caution

The SSM-BT10 is designed for YAESU Bluetooth compatible transceivers. Operation with other Bluetooth compatible devices (such as smartphones and PCs) is not guaranteed.

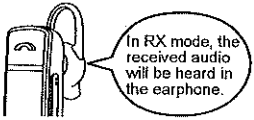How to communicate - Using the wireless VOX function -

- 1**  In RX mode, the received audio will be heard in the earphone.
 - 2**  beep!
OK!
 - 3**  beep!
 - 4** Press and hold the multifunction button for 5 seconds, to turn SSM-BT10 OFF.
- When you start talking, the earphone will make a beep and the transceiver will automatically switch to TX. Continue speaking in a normal voice to transmit.

How to communicate - Normal case -

- 1**  In RX mode, the received audio will be heard in the earphone.
 - 2** When transmitting press briefly.  beep!
 - 3**  OK!
 - 4** Press again briefly to return to receive.  beep!
 - 5** Press and hold the multifunction button for 5 seconds, to turn SSM-BT10 OFF.
- Caution**
Be sure to press the multi function button when you finish talking. If you forget to press it, transmission will continue.

List of typical operations

To	Do this	LED	Announce/Beep
Turn ON.	Press and hold the [MFB] for 3 seconds.	Blinks RED and Blue	Power ON
Turn OFF.	Press and hold the [MFB] for 5 seconds.	Glow RED	Power OFF
Connect with transceiver (First time).	1. Press and hold the [MFB] for 3 seconds. 2. Perform pairing operation with the transceiver.	Blinks RED and Blue (connecting) Blinks Blue (After connection)	Connected (When connected)
Connect with transceiver (Second and subsequent times).	Press and hold the [MFB] for 3 seconds.	Blinks RED and Blue (connecting) Blinks Blue (After connection)	Connected (When connected)
Turn up the Volume.	Press the VOL (+) button.	-	-
Turn down the Volume.	Press the VOL (-) button.	-	-

Maximum volume.	-	-	Pi (At maximum volume)
Minimum volume.	-	-	Pu (At minimum volume)
Disable the SSM-BT10 Microphone.	Press VOL (+) and VOL (-) simultaneously.	-	Mute ON
Enable the SSM-BT10 Microphone.	Press VOL (+) and VOL (-) simultaneously again.	-	Mute OFF
Automatic transmission by VOX function.	Speak into the microphone.	-	Pi (At the start of transmission)
Automatic receive by VOX function.	Stop talking.	-	Pu (At the end of transmission)
PTT transmit by [MFB].	Press the [MFB].	-	Pi (At the start of transmission)

Receive by [MFB].	Press the [MFB] again.	-	Pu (At the end of transmission)
Battery Low level warning.	-	Blinks RED	Battery Low
Power OFF due to voltage drop.	Automatically turns OFF.	-	-
Battery Charge.	Connect to the charger with the supplied USB cable.	Glow RED	-
Charge complete.	-	Glow Blue	-

Note